



PATENTED WRAP RESISTANT SPACERS prevent excessive wrapping meaning less downtime cleaning screens and more uptime producing high-grade OCC streams. To save you even more productive time, both our discs and spacers can be adjusted/replaced without removal of shafts.


MEET ANY TONNAGE REQUIREMENT by choosing our single-deck, double-deck, or triple-deck OCC screen. Throughput capacities for our screens range from 18-60 TPH.

FLEXIBLE SETTINGS GIVE YOU CONTROL Each screening zone is built with a minimum of two independent drives that move each shaft progressively faster. Discover what speeds produce the cleanest end-product from your material streams!


EQUIPMENT SALES & SERVICE OFFICE

Green Machine Sales, LLC
11 East Genesee Street
Baldwinsville, NY 13027

Office: 315.303.5448
Web: www.greenmachine.com
E-mail: sales@greenmachine.com

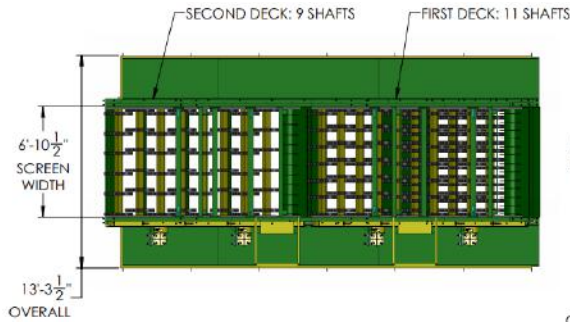

DOUBLE DECK OCC SCREEN
20 SHAFTS TOTAL

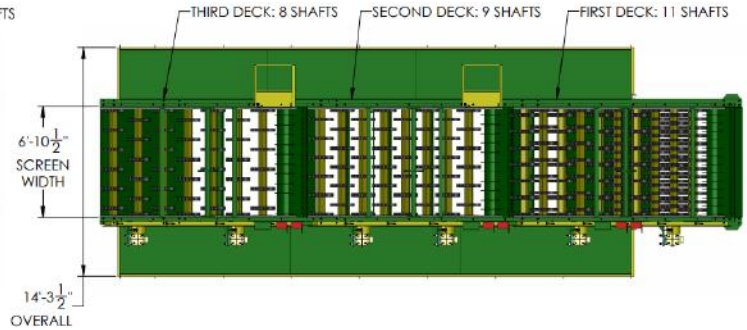

TRIPLE DECK OCC SCREEN
28 SHAFTS TOTAL

SPECIFICATIONS

AVAILABLE DECKS	1,2, or 3 Decks; Modular Design Deck Widths: 60" - 102"
IFO	Designed to Suit each Application (Field Adjustable); 2 1/2" Thick x 24" Dia. Finger Discs with Split Hub Design
SPACERS	Patented Wrap Resistant Spacers with Split Hub Design
SHAFT SPINDLES	Removable Without Disturbing the Shaft. B-Bearing: Sealed Pillow Block Bearings
SPROCKETS	Hardened Double-Single Times Sprockets. Chain: RC 120
MOTOR(S)	5 HP - 7.5 HP TEFC Energy Efficient Gear Motor (460/3/60). Reducers: Class 2 Dodge Reducers, Antishock Belt Drive Reducer
VARIABLE FREQUENCY DRIVE(S)	Not Included; Quote Available Upon Request; Angle: Fixed at 7 Degrees
AUTO-LUBE	Automatic Oiler System for the Drive Chain Including: Reservoir, Solenoid, Distribution Manifold, Copper Plumbing, and Adjustable Applicators

EQUIPMENT SALES & SERVICE OFFICE

Green Machine Sales, LLC
11 East Genesee Street
Baldwinsville, NY 13027

Office: 315.303.5448
Web: www.greenmachine.com
E-mail: sales@greenmachine.com